

Rugby

Rugby Goalposts

Mini Rugby

Tackle Equipment

Rugby Post Protectors

Flag Poles

Assembly Rollers



Sports

Equipment & Flooring





Millennium posts

Rugby goalposts Aluminium

Supplied in sets of two goals.

Millennium posts

International specification, extra heavy duty, aluminium with white polyester coated finish, as used at the Millennium Stadium, Cardiff. Hinged socket for ease of erection. 1.5m deep, 146mm x 6.5mm thick galvanised socket.

Stainless steel fasteners

Bottom upright. Aluminium. 7.3m long, 140mm x 4mm.

Second upright. Aluminium. 7.3m long, 130mm x 3mm.

Top upright. Aluminium. 4.16m long, 120mm x 3mm.

**17m out of ground height
3 piece uprights** **OSE-R1443**

**13.5m out of ground height
2 piece uprights** **OSE-R1444**

Millennium post protectors

Red flame retardant reinforced polyester PVC cover filled with 75mm thick high density foam. Complete with integral Velcro fastening edges. Other colours are available on request.

1.8m high x 450mm wide face **OSE-R1441**



Hinged posts detail

Hinged aluminium posts

Bottom uprights 7m long - 76mm diameter x 5mm thick. Top uprights 7m long - 63.5mm diameter x 3mm thick. Crossbar 5.6m long 50mm diameter x 3mm thick. 1006mm deep sockets complete with stabilising fins and base plates. Hinged adaptors with high tensile bolts make erection of posts safer. Stainless steel fasteners.

**13m out of ground height
(2 piece uprights)** **OSE-R1448**


**11m out of ground height
(2 piece uprights)** **OSE-R1449**

**7m out of ground height
(1 piece upright)** **OSE-R1451**

Standard aluminium posts

Lightweight posts and uprights supplied in sections for easy transportation and storage. All posts are complete with 91cm sockets with stabilising fins and base plates. Specification as per hinged aluminium but without hinged adaptors. Cross bar 50mm diameter, 5.6m long x 3mm. Two piece uprights.

12m out of ground height **OSE-R1440**
10m out of ground height **OSE-R1442**

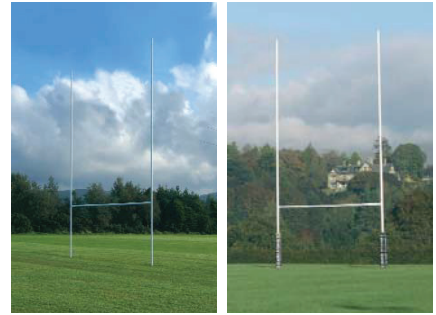

Standard aluminium posts Premier club standard posts

Rugby goalposts Steel

Supplied in sets of two goals. All tops are capped. Crossbars set 3.05m from the ground (except mini posts).

International standard

Uprights made in two sections for easier transportation and storage. Specification as per hinged steel but without adaptors. Cross bars 76mm diameter. Complete with 1.2m sockets; to increase stability these are specially designed with two side fins and base plate.

12m out of ground height **OSE-R1430**

Premier club standard

Same specification as international.

10m out of ground height **OSE-R1432**

Club standard

Uprights made in two sections for easier transportation and storage. Bottom uprights 6m long, 70mm diameter x 2mm thick. Top uprights 5m long, 63.5mm diameter x 2mm thick. Crossbars 63.5mm diameter x 2mm thick. Complete with 91cm tubular steel sockets with fins and base plate.

9m out of ground height **OSE-R1434**

Whatever your sport, we've got it covered...



School standard posts

School standard

One piece uprights, 63.5mm diameter. Complete with 91cm tubular steel sockets with fins and base plate.

6m out of ground height **OSE-R1436**

Heavy duty standard posts

Specification as per hinged steel but without hinged adaptor. 76mm diameter one piece uprights. Complete with 91cm tubular steel sockets with fins and base plate. Double bolted crossbar.

6m out of ground height **OSE-R1438**

Hinged steel posts

Type A

Bottom uprights 7.5m long - 89mm diameter x 3.2mm thick. Top uprights 6.5m long - 76mm diameter x 3.2mm thick. 1.2m deep sockets complete with stabilising fins and base plates. Hinged adaptors with high tensile bolts make erection of posts safer. Stainless steel bolts throughout.

13m out of ground height (2 piece uprights) **OSE-R1457**

11m out of ground height (2 piece uprights) **OSE-R1459**

Type B

Same specification as club standard but with hinged ground sockets for ease of erection and dismantling.

10m out of ground height **OSE-R1435**



Heavy duty posts

Type C

Same specification as schools standard but with hinged ground sockets for ease of erection and dismantling.

7m out of ground height **OSE-R1437**

Heavy duty hinged posts

Specification as per Type C posts but manufactured from extra heavy duty 76mm diameter x 3.2mm thick steel tube throughout.

7m out of ground height (1 piece uprights) **OSE-R1461**

Ground sockets and lids

Details of spare replacement ground sockets and lids available on request.

Mini rugby

Socketed mini rugby posts - aluminium

Uprights 5.6m long - 63mm diameter x 3mm thick. Crossbar 4.5m long - 50mm diameter x 3mm thick. 600mm deep sockets.

5m out of ground height (1 piece upright) **OSE-R1453**

Portable mini rugby posts - UPVC

Specially designed for mini rugby and use on grass. Size approximately 3.6m x 3m wide with a 2m crossbar. 'No hole' post support system leaves virtually no trace when removed. **OSE-R1452**

Multi-bag

For portable UPVC mini rugby posts **OSE-R1454**



Tackle and rucking pads

Combination rugby/football posts

7.3m overall height. 60mm steel throughout. 2 No. crossbars, 1 x 2.44m high and 1 x 3m high. 91cm ground sockets. **OSE-R1500**

Tackle equipment

Rugby scrum machines

Sturdy scrum machines with 4 spring loaded PVC covered foam pads bolted to 4 uprights. Softwood floor treated with creosote.

TCE-R0604

Rugby tackle bags

Made from hard wearing, extra strong blue nylon reinforced PVC, filled with polythene foam. Complete with nylon flap and brass eyelets in the top with rope drawstring.

Senior size

Approximately: 1.4m high 46cm diameter.

TCE-R0605

Junior size

Approximately: 1.37m high 31cm diameter.

TCE-R0606

Rucking pads

Wedge shaped and foam filled aids.

Senior - weight 3kg

TCE-R0607

Junior - weight 2kg

TCE-R0608



Rugby post protectors

Post protection

Post protectors are supplied in sets of four. Covers can be screen printed with sponsors or club name on request.

Club rugby post protectors

To fit maximum 100mm diameter posts.

GTC 10 single colour

Red flame retardant reinforced polyester PVC cover filled with 75mm thick high density foam. Complete with integral Velcro fastening edges.

1.8m high x 254mm wide face [OSE-R1470](#)
1.8m high x 305mm wide face [OSE-R1471](#)
1.8m high x 355mm wide face [OSE-R1472](#)

GTC 10 multi-coloured

Specification as GTC 10 single colour pads, but available with up to 4 panels in a combination of the following colours: royal blue, sky blue, navy blue, white, black, red, yellow and green.

1.8m high x 254mm wide face [OSE-R1473](#)
1.8m high x 305mm wide face [OSE-R1474](#)
1.8m high x 355mm wide face [OSE-R1475](#)

Schools rugby post protectors

To fit maximum 150mm diameter posts.

GTC 11 single colour

For easy and quick attachment they are eyeleted one side and are supplied complete with four white adjustable straps.

1.8m x 0.56m x 50mm thick. [OSE-R1460](#)



Assembly roller in use

GTC 11 multi-coloured

As OSE-R1460 but available in blue/white/black/red/yellow/green/maroon/navy or a combination of these. [OSE-R1462](#)

Flag poles

Standard corner pole

1.8m tall safety standard flag pole.

[OSE-R1456](#)

Spring back corner pole

Safety standard corner pole that bends on impact and returns to the original position, ground anchors included.

[OSE-R1458](#)

Corner pole flags

Single colour

[OSE-R1480](#)

Two colour

[OSE-R1481](#)



Spring back corner poles



Assembly roller detail

Hinged post assembly roller

The hinged post assembly roller allows you to safely erect and dismantle a set of hinged posts in a controlled manner.

Designed to be mounted onto an appropriate tractor using two heavy duty 'U' bolt brackets, the upright rolls along the device with the aid of the tractor roll bar before being lifted off by a suitable number of persons (the tractor must ideally be fitted with an angled or adjustable roll bar, brackets will fit up to a 60mm square bar).

A minimum of two people should always oversee the safe erection or dismantling of the rugby posts. Never allow the tractor's speed to exceed walking pace; we recommend that the tractor moves no faster than 3mph.

The hinged post assembly roller is manufactured from steel and fitted with a rubber roller, a quick release webbed safety strap and two 'U' bolt brackets.

The device is designed for use with hinged uprights only, we do not recommend the use of the hinged post assembly roller on socketed uprights.

5kg each [OSE-R1490](#)



Assembly roller detail

Whatever your sport, we've got it covered...